

# Harvest the Sunshine

# JA SOLAR

# 650W



## JAM72D42 LB n-type Double Glass Bifacial Modules

### Premium Cells

n-  
Bycium+  
16BB

MBB Half-Cell  
Technology

# 26%



Cell Conversion  
Efficiency

### Premium Modules



Higher power  
generation better LCOE




n-type with very  
Lower LID



Better Temperature  
Coefficient



Better low irradiance  
response

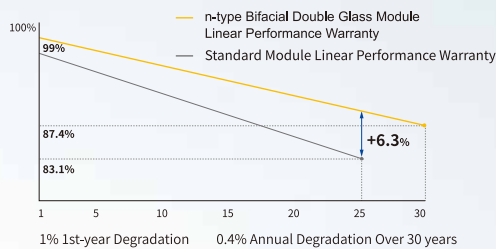

12 12-year product warranty

30 30-year linear power output warranty

### Comprehensive Certificates


- IEC 61215, IEC 61730, UL 61215, UL 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems
- IEC 62941: 2019 Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing



## DEEP BLUE 4.0 Pro

# JAM72D42 LB

n-type Double Glass Bifacial Modules

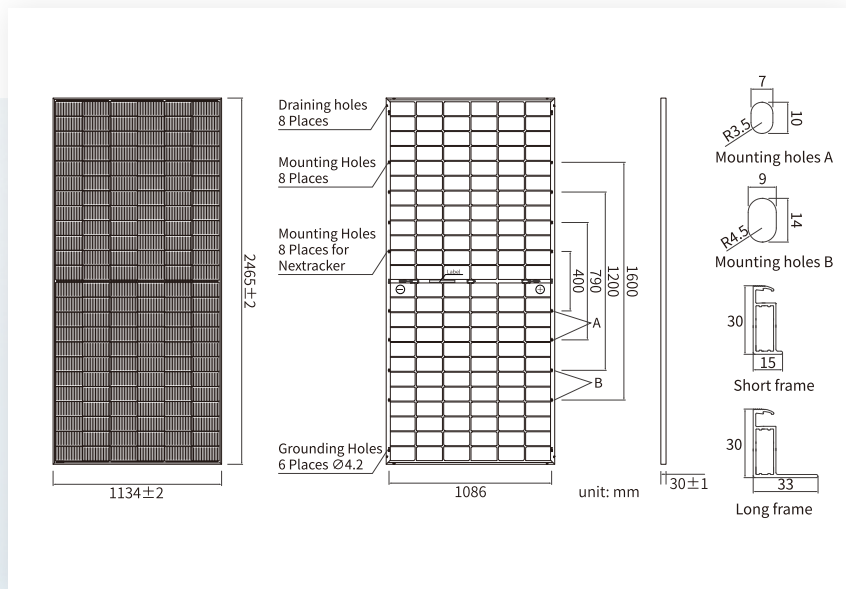

## MECHANICAL PARAMETERS

Cell	Mono
Weight	34.6kg
Dimensions	2465±2mm×1134±2mm×30±1mm
Cable Cross Section Size	4mm <sup>2</sup> (IEC), 12 AWG(UL)
No. of cells	144(6×24)
Junction Box	IP68, 3 diodes
Connector	QC 4.10-351/ MC4-EVO2A
Cable Length (Including Connector)	Portrait: 300mm(+)/400mm(-) Landscape: 1500mm(+)/1500mm(-)
Front Glass/Back Glass	2.0mm/2.0mm
Packaging Configuration	36pcs/Pallet, 576pcs/40HQ Container

Remark: customized frame color and cable length available upon request

## ELECTRICAL PARAMETERS AT STC

TYPE	JAM72D42 -625/LB	JAM72D42 -630/LB	JAM72D42 -635/LB	JAM72D42 -640/LB	JAM72D42 -645/LB	JAM72D42 -650/LB
Rated Maximum Power(Pmax) [W]	625	630	635	640	645	650
Open Circuit Voltage (Voc) [V]	52.27	52.47	52.67	52.87	53.07	53.27
Maximum Power Voltage(Vmp) [V]	43.71	43.90	44.10	44.29	44.49	44.67
Short Circuit Current(Isc) [A]	15.16	15.21	15.26	15.31	15.36	15.41
Maximum Power Current(Imp) [A]	14.30	14.35	14.40	14.45	14.50	14.55
Module Efficiency [%]	22.4	22.5	22.7	22.9	23.1	23.3
Power Tolerance	0~+3%					
Temperature Coefficient of Isc(α <sub>Isc</sub> )	+0.045%/°C					
Temperature Coefficient of Voc (β <sub>Voc</sub> )	-0.250%/°C					
Temperature Coefficient of Pmax(γ <sub>Pmp</sub> )	-0.290%/°C					
STC	Irradiance 1000W/m <sup>2</sup> , cell temperature 25°C, AM1.5G					


Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

## ELECTRICAL CHARACTERISTICS WITH 10% SOLAR IRRADIATION RATIO

TYPE	JAM72D42 -625/LB	JAM72D42 -630/LB	JAM72D42 -635/LB	JAM72D42 -640/LB	JAM72D42 -645/LB	JAM72D42 -650/LB
Rated Max Power(Pmax) [W]	675	680	686	691	697	702
Open Circuit Voltage(Voc) [V]	52.27	52.47	52.67	52.87	53.07	53.27
Max Power Voltage(Vmp) [V]	43.71	43.90	44.10	44.29	44.49	44.67
Short Circuit Current(Isc) [A]	16.37	16.43	16.48	16.53	16.59	16.64
Max Power Current(Imp) [A]	15.44	15.50	15.55	15.61	15.66	15.71
Irradiation Ratio (rear/front)	10%					

\* For Nexttracker installations, maximum static load please take compatibility approve letter between JA Solar and Nexttracker for reference.

## CHARACTERISTICS

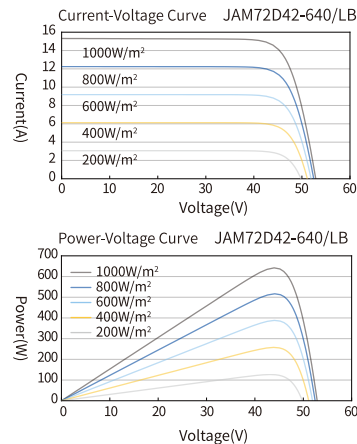

## OPERATING CONDITIONS

Maximum System Voltage	1500V DC
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	30A
Maximum Static Load, Front*	5400Pa(112 lb/ft <sup>2</sup> )
Maximum Static Load, Back*	2400Pa(50 lb/ft <sup>2</sup> )
NOCT	45±2°C
Bifaciality	80%±5%
Safety Class	Class II
Fire Performance	UL Type 29/Class C